

GFLZZ1235-20A2

15KV 20KV MEDIUM VOLTAGE 5P20 INDOOR HIGH ACCURACY CURRENT TRANSFORMER 0.2S

This model GFLZZ1235-20A2 indoor dry type current transformer is used in 15kV, 17.5kV, 20kV, 22kV and 24kV power system, for measuring and protection. It has been used in outdoor pole mounted and transmission line. This product has the characteristics of high efficiency and large capacity, and can be customized according to customer requirements.


For insulation and protection, the assembly is cast in hydrophobic cycloaliphatic epoxy (HCEP) using automatic vacuum pressure. The HCEP material offers superior arc track, ozone, and ultraviolet-resistive properties while maintaining physical strength. Primary and secondary use pure electrolytic copper, both winding and core have high voltage shielding processing. The hydrophobic surface properties of HCEP ensure highly reliable performance in wet, humid, or polluted environments.

It can be used for less than 20KV distribution cabinet, Coal mine, power plant, Rail way, factories... .

All of our GFUVE current transformers are strictly comply IEC60044-1, IEC 61869-2, ANSI/IEEE C57.13, GB1208-2006, NBR6855, GB/T20840.1-2010, GB/T 20840.2-2014, GB/T 22071.1-2018, IEC/EN61010-2-032, IEC/EN 61010-2-031.

Features


1. Weight: 35KG;
2. Material:Epoxy(HCEP) ;
3. Rated voltages up to 24 kV;
4. Using life: more than 30 years;
5. 15KV 17.5KV 20KV 24KV indoor using;
6. Secondary current output 5A or 1A;
7. Reasonable structure and robust construction;
8. Rated basic insulation levels (BIL) up to 125 kV;
9. Built-in surge protection for current transformers;
10. Standard & Special High Accuracy metering classes;
11. Accuracy class: 0.2S 0.2, 0.5S, 0.5, 1, 5P20, 5P10, 10P20;
12. Convenient installation, suitable for installation in any location;
13. High accuracy, extended range ratings for current transformers;
14. Dry-type design, environmentally Friendly & Minimum Maintenance;
15. IEC60044-1, IEC 61869-2, GB/T 20840.1,2 & ANSI/IEEE C57.13, NTC 2205 Standards;

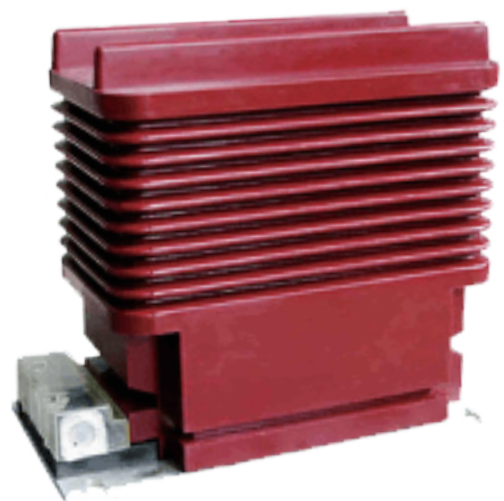

Application

1. Airport;
2. Rail way;
3. Coal Mine;
4. Power plant;
5. Energy meter;
6. Power Meter;
7. Power station;
8. Oil, gas company;
9. Air switch cabinet;
10. Distribution system;
11. Ring network cabinet;
12. Electric Power Bureau;
13. Measuring instrument;
14. Primary metering cabinets;
15. MV Power Quality Analyzer;
16. Substation metering and relaying;
17. Industrial and mining enterprises;

Outline Drawing

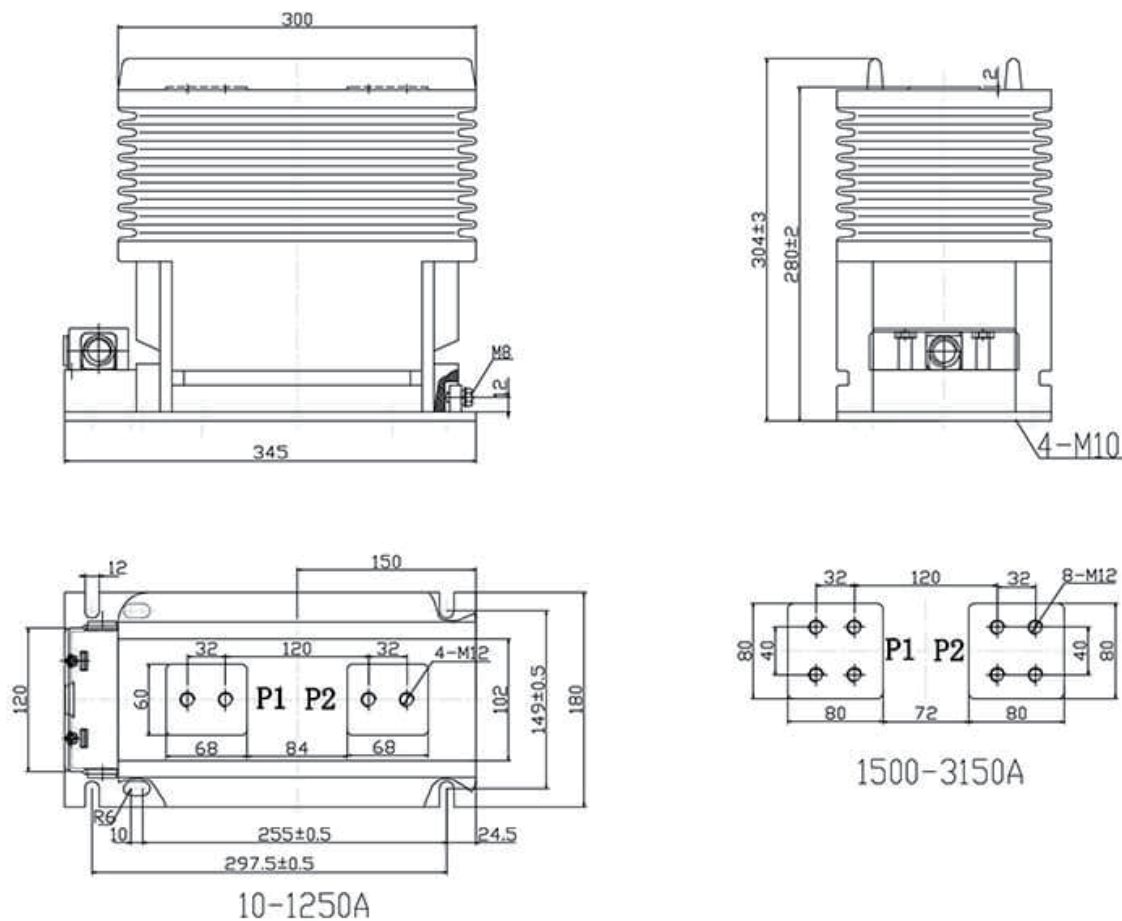

15KV 100/5A 20VA 5P20 17.5/38/95KV 50HZ

Parameters

Technical parameters	
Standards	IEC60044-1; IEC 61869-2; NTC 2205; ANSI/IEEE C57.13; GB1208-2006; GB/T 20840.1-2010, GB/T 20840.1,2, GB/T 22071.1-2018
Accuracy Class	0.2S, 0.2, 0.5S, 0.5, 1 (IEC61869-2 standard) 5P20, 5P10, 10P10, 10P5, 10P15, 5P15
Rated primary current	5-3150A
Rated load	≤50VA
Rated frequency	50Hz or 60Hz
Rated secondary current	5A or 1A
Ratio	5/5A, 100/5A, 200/5A, 300/5A ...3150/5A or 1A
Rated short-time thermal current	100kA, 1S
Rated continuous thermal current	120%I _n
Rated dynamic current	200kA
Secondary winding power-frequency voltage	3kV, 1min
Rated insulation level	24/65/125KV
Instrument security factor	FS ≤10
Insulation Class	E
Rated Voltage level	15KV, 17.5KV, 20KV, 24KV
Mechanical parameters	
Dimensions (W×D×H) (mm)	300x180x304
Material	Epoxy resin
Weight (kg)	35
Operating conditions	
Operating temperature	-25°C to +70°C
Daily average temp	<+40°C
Storage temperature	-40°C to +70°C
Environment	indoors
Altitude	<3000 meters
Condition	No existence of severely begrimed, erosive and radioactive gas in the air. Permission of long-term operation under rated current.

Technical Data

Rated Primary Current(A)	Class Combination	Accuracy class and Rated output(VA)							Short-time thermal current (kA/S)	Rated dynamic current (kA)
		0.2S	0.5S	0.2	0.5	10P10	10P15	5P20		
5-150	0.2(S)/0.2(S) 0.2(S)/10P 0.5/10P 0.2(S)/5P20 0.5/5P20	10	10	10	15	30	20	15	90 IIn	225 IIn
200-300									50	125
300-800									63	130
800-1500				15	20	40	30	20	80	160
1500-2000									100	160
2000-3150									100	160
5-150	0.2(S)/0.2(S)/10P 0.2(S)/0.5(S)/10P 0.5(S)/0.5(S)/10P	10	10	10	15	20	15	10	90 IIn	225 IIn
200-300									50	125
300-800									63	130
800-1500					20	30	20	15	80	160
1500-2000									100	160
2000-3150									100	160
5-150	0.2(S)/10P/10P 0.5(S)/10P/10P	10	10	10	15	15			90 IIn	225 IIn
200-300									50	125
300-800									63	130
800-1500					20	20			80	160
1500-2000									100	160
2000-3150									100	160

Ordering Information

Be sure to the type, current ratio, accuracy class, rated load and use of the products when you plan to make a order. Special specifications could be customized. All kinds of different specifications and parameters current transformers can be made according to your needs.